NOVALAB thermostatic mixer for eyeshowers, temperature range 22-28°C

Constant water temperature: Prevents temperature fluctuations, scald protection: Protects against excessively hot water in the event of faults, continuous supply of water if hot water fails

Attributes

- Nominal pressure PN 10 bar
- Differential pressure, cold/hot water supply max. 0.3 bar
- Differential pressure for activating the bypass function: 0.5 bar
- Max. Media temperature: 95 °C

Variants	Art.-No.:
	87 3400 01 45

Dimensional Drawings

Art.-No.: 87 3400 01 45

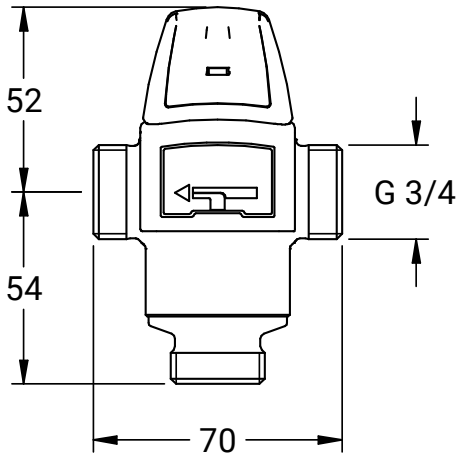

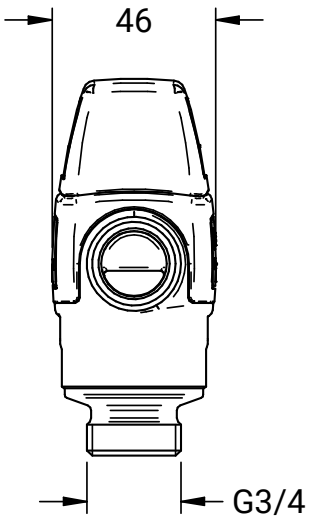

NovaLab GmbH
Brunsbütteler Damm 446
13591 Berlin

Phone +49 (0) 30 36 403 36 20
Fax +49 (0) 30 36 403 36 26
Mail: info@novalab-gmbh.de