

NOVALAB safety shower with ball valve and tie-rod actuation for surface mounting, water connection on all sides, stainless steel design



Attributes

- Water connection on all sides
- Water supply from behind the wall
- Pull rod guided, with triangle handle and sealing option
- Actuation optionally right/left
- Wall flange with ball valve, wall bracket and safety shower head
- Emergency shower head with nozzle holes and swirl discs for optimum spray jet
- Self-draining shower head and wall bracket by gradient
- Fitting does not close automatically
- Safety shower head with 5 nozzle bores (approx. 30 l/min at 1 bar flow pressure) or 7 nozzle bores (approx. 60 l/min at 1.5 bar flow pressure)
- Wasseranschluss: Innengewinde G3/4
- Stainless steel
- Fulfills the requirements of DIN EN 15154-1 and the German BGI/GUV-I 850-0 'Safe working in laboratories'
- With safety sign 'safety shower' as a sticker in accordance with ISO 3864-1
- With mounting material and technical product information





Variants

Art.-No.:

safety-shower head with 5 jets	
Volumetric flow rate approx. 30 l/min at 1 bar flow pressure	60 1740 34
safety-shower head with 7 jets	
Volumetric flow rate approx. 60 l/min at 1,5 bar flow pressure	60 1745 34

Dimensional Drawings

Art.-No.: 60 1740 34

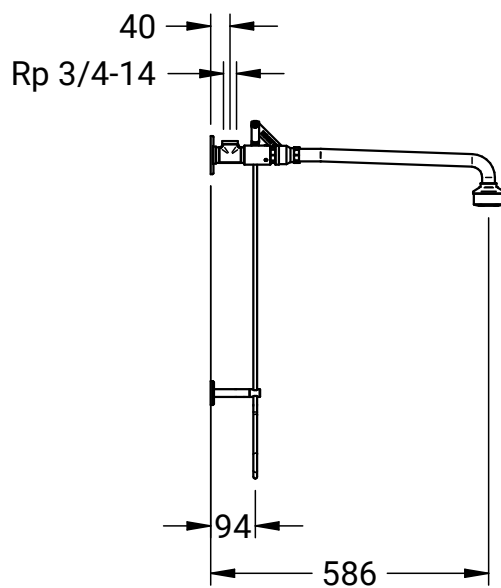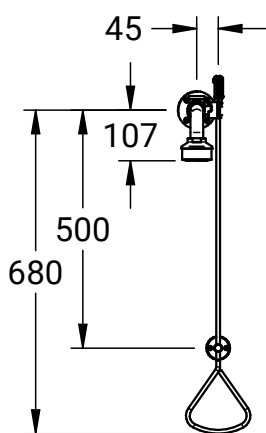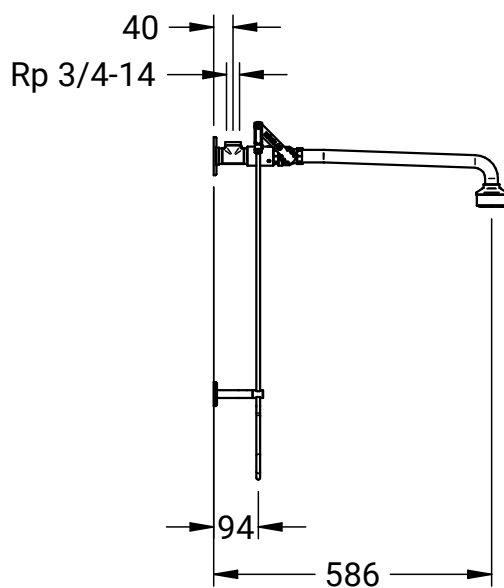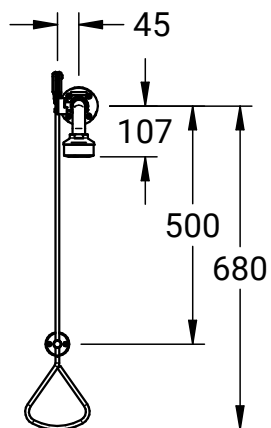

Pressure Loss Curve

