

NOVALAB safety shower with ball valve and tie-rod actuation, for installation in on-site branch stub, stainless steel design



Attributes

- Pull rod guided, with triangle handle and sealing option
- Emergency shower head with nozzle holes and swirl discs for optimum spray jet
- Self-draining shower head and wall bracket by gradient
- Fitting does not close automatically
- Safety shower head with 5 nozzle bores (approx. 30 l/min at 1 bar flow pressure) or 7 nozzle bores (approx. 60 l/min at 1.5 bar flow pressure)
- Water connection: external thread G3/4B
- Stainless steel
- Fulfils the requirements of DIN EN 15154-1 and the German BGI/GUV-I 850-0 'Safe working in laboratories'
- With safety sign 'safety shower' as a sticker in accordance with ISO 3864-1
- With mounting material and technical product information





Variants

Art.-No.:

safety-shower head with 5 jets	
Volumetric flow rate approx. 30 l/min at 1 bar flow pressure	60 1750 34
safety-shower head with 7 jets	
Volumetric flow rate approx. 60 l/min at 1,5 bar flow pressure	60 1755 34

Dimensional Drawings

Art.-No.: 60 1750 34

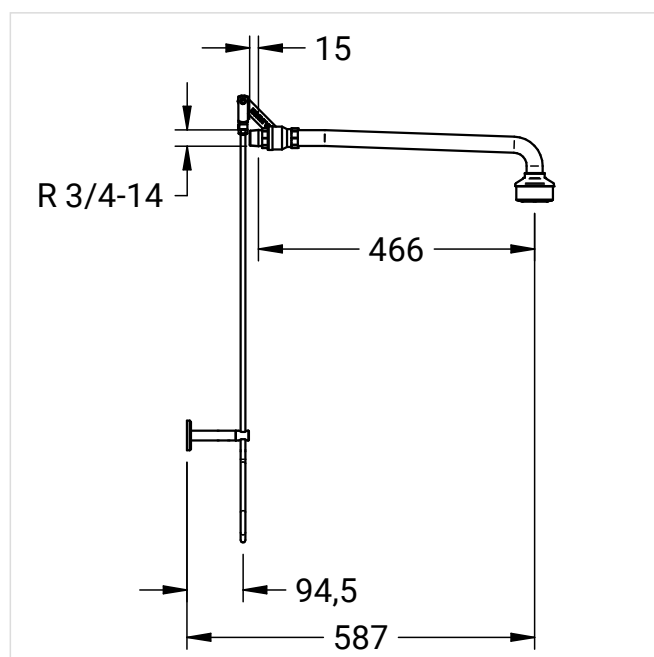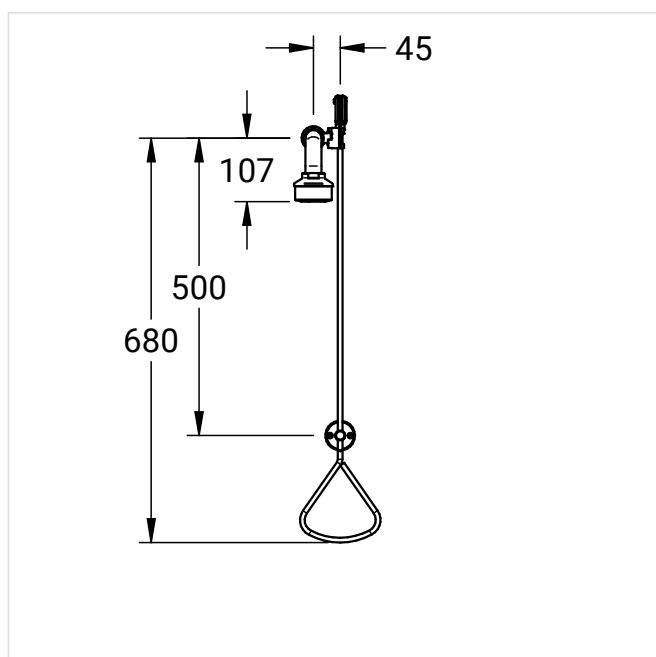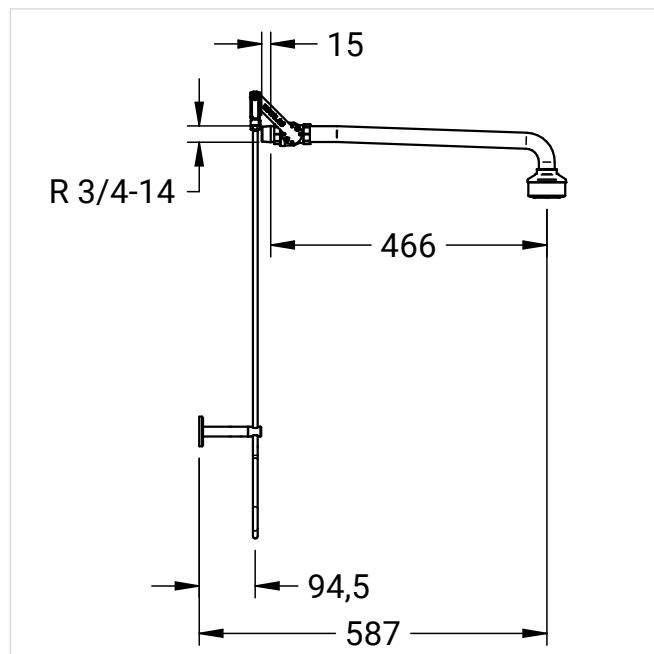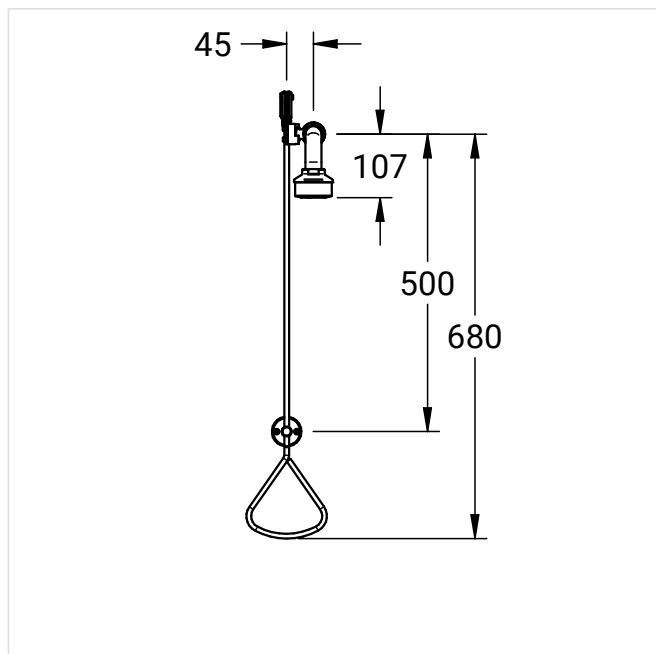

Pressure Loss Curve

