


## NOVALAB Hygienic flushing module for cyclic flushing of stagnant water pipes

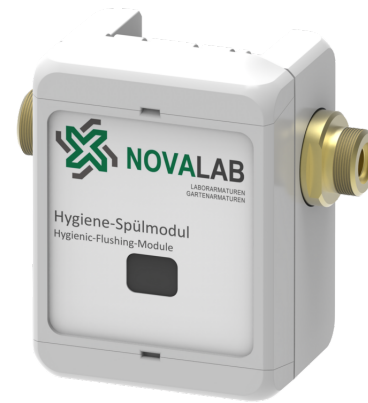

### Attributes

- Nominal pressure PN 8 bar
- Connection thread G 1/2"
- Flow control 2.5 l/min, 6 l/min and 9 l/min included
- Integrated programmable control electronics (selectable flushing times and intervals)
- Integrated solenoid valve
- Ready-to-install complete unit
- for supply pipes with WPC, WPH, WNC or WNH
- z.B. für die Anbindung an die GLT

### Variants

### Art.-No.:

|                                                                                                                                                                                    |                   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|
|                                                                                                                                                                                    | <b>50 0100 00</b> |
| Power supply: Battery                                                                                                                                                              | <b>01</b>         |
|                                                                                                                                                                                    | <b>50 0100 00</b> |
| Power supply: Plug-in                                                                                                                                                              | <b>02</b>         |
| Power supply: Power supply for concealed box                                                                                                                                       | <b>50 0100 00</b> |
|                                                                                                                                                                                    | <b>03</b>         |
| Power supply: Battery                                                                                                                                                              |                   |
| With potential-free contact to the operating status indicator of the flushing valve (e.g. for connection to the BMS)                                                               | <b>50 0101 00</b> |
|                                                                                                                                                                                    | <b>01</b>         |
| Power supply: Plug-in                                                                                                                                                              |                   |
| With potential-free contact to the operating status indicator of the flushing valve (e.g. for connection to the BMS)                                                               | <b>50 0101 00</b> |
|                                                                                                                                                                                    | <b>02</b>         |
| Power supply: Plug-in for concealed box                                                                                                                                            |                   |
| With potential-free contact to the operating status indicator of the flushing valve (e.g. for connection to the BMS)                                                               | <b>50 0101 00</b> |
|                                                                                                                                                                                    | <b>03</b>         |
| Power supply: Plug-in power supply with bidirectional potential-free contact for external triggering of a flush and operating status display of the flush valve                    | <b>50 0102 00</b> |
|                                                                                                                                                                                    | <b>02</b>         |
| Power supply: Power supply unit for flush-mounted box with bidirectional potential-free contact for external triggering of a flush and operating status display of the flush valve | <b>50 0102 00</b> |
|                                                                                                                                                                                    | <b>03</b>         |

## Dimensional Drawings

Art.-No.: 50 0100 00 01

