


NOVALAB Hygienic flushing module for cyclic flushing of stagnant demineralized water pipes

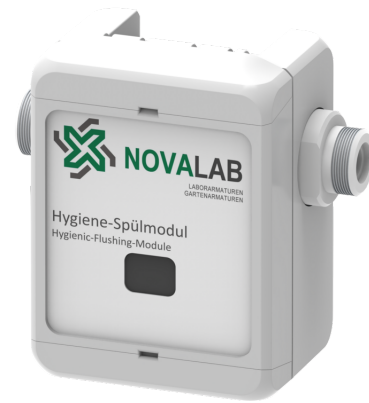

Attributes

- Integrated solenoid valve suitable for demineralized water
- for supply pipes with WDC, WDH, WDI
- Nominal pressure PN 8 bar
- Connection thread G 1/2"
- Flow control 2.5 l/min, 6 l/min and 9 l/min included
- Integrated programmable control electronics (selectable flushing times and intervals)
- Ready-to-install complete unit
- z.B. für die Anbindung an die GLT

Variants

Art.-No.:

Power supply: Battery	50 0100 00 04
Power supply: Plug-in	50 0100 00 05
Power supply: Power supply for concealed box	50 0100 00 06
Power supply: Battery With potential-free contact to the operating status indicator of the flushing valve (e.g. for connection to the BMS)	50 0101 00 04
Power supply: plug-in With potential-free contact to the operating status indicator of the flushing valve (e.g. for connection to the BMS)	50 0101 00 05
Power supply: transformer With potential-free contact to the operating status indicator of the flushing valve (e.g. for connection to the BMS)	50 0101 00 06
Power supply: Plug-in power supply with bidirectional potential-free contact for external triggering of a flush and operating status display of the flush valve	50 0102 00 05
Power supply: Power supply unit for flush-mounted box with bidirectional potential-free contact for external triggering of a flush and operating status display of the flush valve	50 0102 00 06

Dimensional Drawings

Art.-No.: 50 0100 00 04

