


NOVALAB laboratory bench mounted straight (2) taps for compressed air (CA) with fixed nozzle, connection thread G1/2"

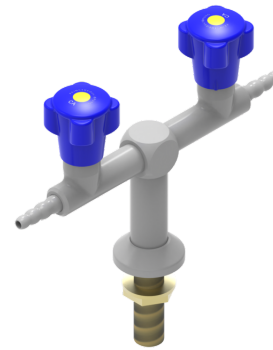

Attributes

- Flow rate ca. 3,70 m³/h at 3 mbar flow pressure
- All-metal valve body, EPS-coated, grey RAL 7035
- Four-wing ergonomic operating handles according to DIN 13792
- Headwork with needle regulation
- Nominal pressure PN 10 bar
- Connection/fastening thread G3/8" - 11 mm long
- Hose nozzle diameter 10/13 mm

Variants

Art.-No.:

77 9753 25 53

Dimensional Drawings

Art.-No.: 77 9753 25 53

