NOVALAB laboratory double bench mounted multimedia tap for water (WPC) and natural gas (G) or propane (C3H8) with lock coupling and plug-in nozzle, connection Ø8 mm (WPC), Ø10 (G/C3H8)

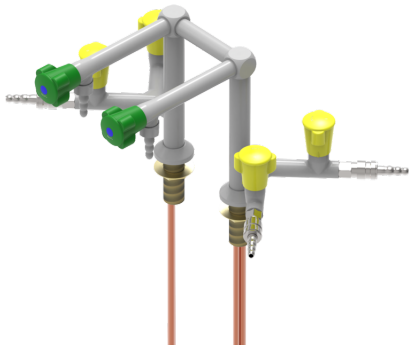

Attributes

- All-metal valve body, EPS-coated, grey RAL 7035
- Four-wing ergonomic operating handles according to DIN 13792
- Two-part ergonomic operating handles according to DIN 13792 with anti-twist protection and a visually recognisable operating state.
- Nominal pressure PN 0,2 bar
- Nominal pressure PN 10 bar
- Connection/fastening thread G3/4" - 70 mm long
- Connection pipe Ø 8x1
- Connection pipe Ø 10x1
- Hose nozzle diameter 10/13 mm
- With mounting set

Variants	Art.-No.:
Oberteile mit Kegeldichtung für Wasser, für Erdgas (G)	**74 4042 35 60**
Headwork with cone sealing, for propane (C3H8)	**74 4042 35 61**
Headwork wit ceramic disc, for natural gas (G)	**74 4042 35 60 02**
Headwork with ceramic disc, for propane (C3H8)	**74 4042 35 61 02**

Dimensional Drawings

Art.-No.: 74 4042 35 60

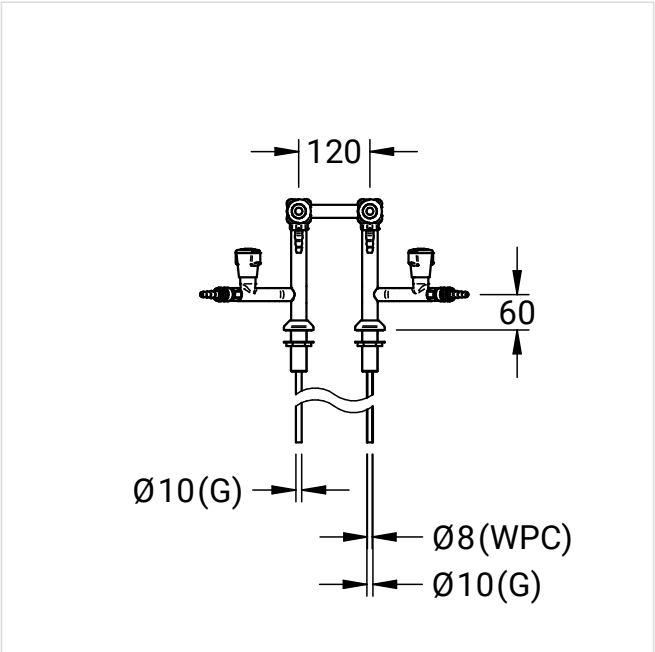

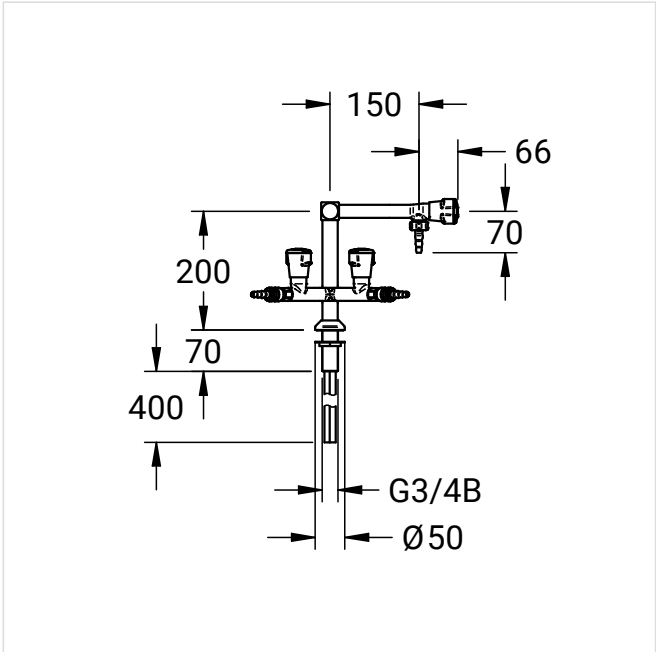

NovaLab GmbH
Brunsbütteler Damm 446
13591 Berlin

Phone +49 (0) 30 36 403 36 20
Fax +49 (0) 30 36 403 36 26
Mail: info@novalab-gmbh.de

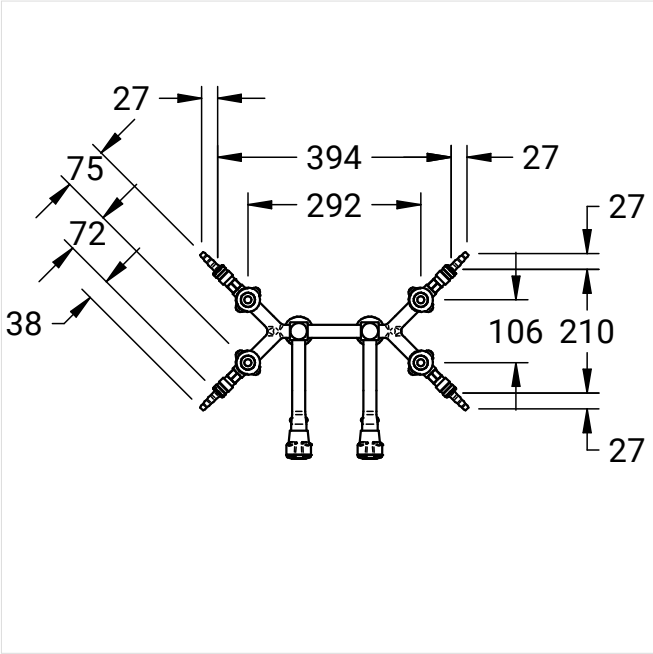

NovaLab GmbH
Brunsbütteler Damm 446
13591 Berlin

Phone +49 (0) 30 36 403 36 20
Fax +49 (0) 30 36 403 36 26
Mail: info@novalab-gmbh.de